

# Flow-Through Fittings

Water



## ARF 101 Flow-Through Fitting

PVC flow-through fitting for direct mounting of a 12 mm sensor

Easy mounting with adhesive sleeve, directly in the pipeline. For all sensors with Pg 13.5 connection, 12 mm diameter and 120 mm length.

### Facts

- Material: PVC
- DN 50 adhesive sleeve
- For sensors with Pg 13.5 connection

### Applications

industrial water, surface water, water processing; clean to moderately polluted waters

### Product Line

ARF 101 Flow-Through Fitting


Order No.

ARF 101

### Specifications


Material:	PVC
Process wetted sealings:	FKM (Viton)
Process connection:	DN 50 (Ø 63 mm) adhesive sleeve
Pressure:	4 bars (45 °C), 1 bar (60 °C)
Temperature:	Max. 60 °C
Sensor locations:	1 x Pg 13.5
Sensors:	Pg 13.5, L = 120 mm

### Pressure / Temperature Diagram

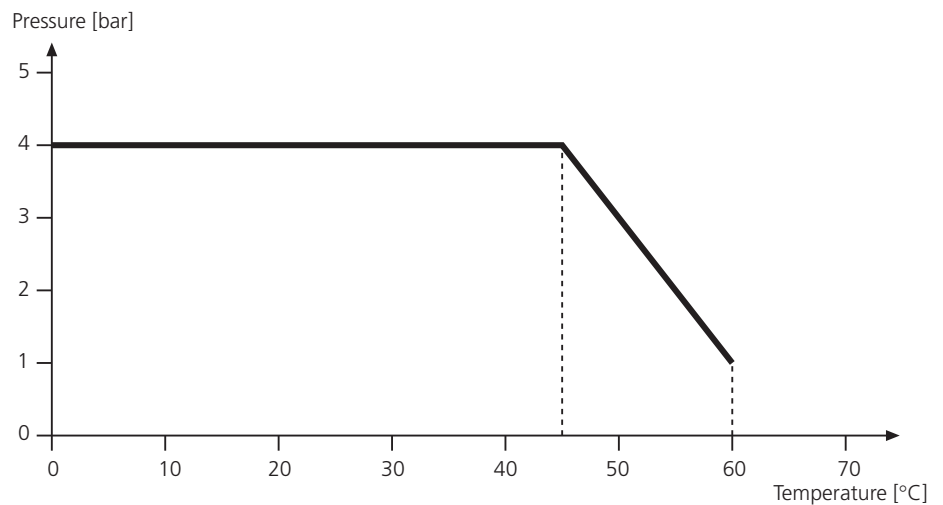


### Modular System

This flow-through fitting is available complete with sensor adapter and adhesive sleeve.

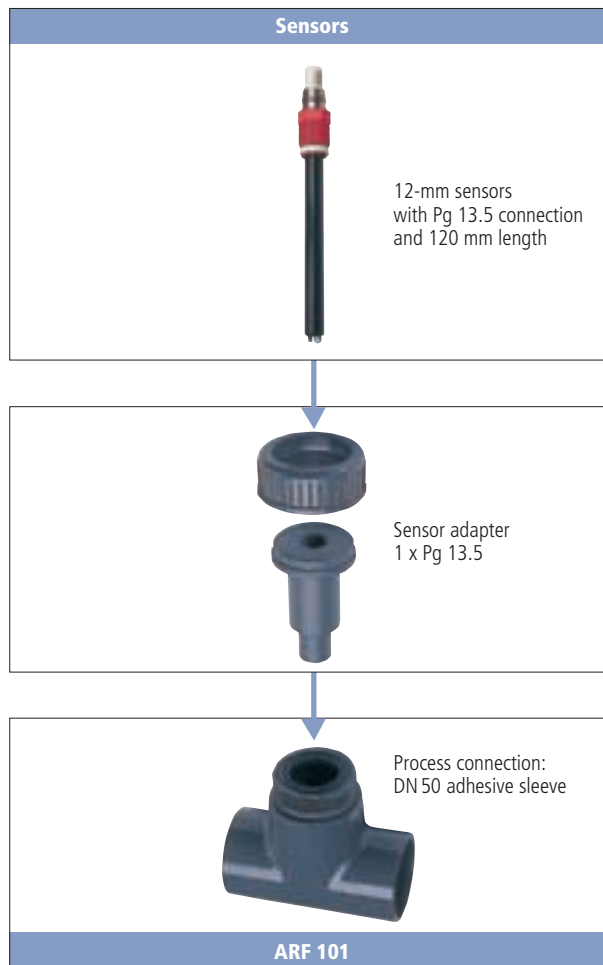

### Dimension Drawing



All dimensions in mm!